



ULTRA MAX®

Sealed Lead Acid Rechargeable Battery Product Specification

SLAUMXNP7-12 (12V7AH)

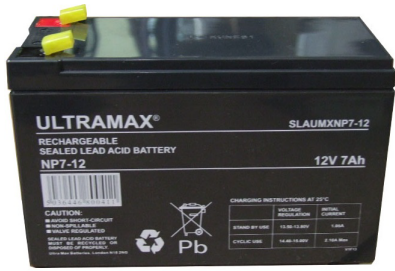


Outer dimensions (mm)

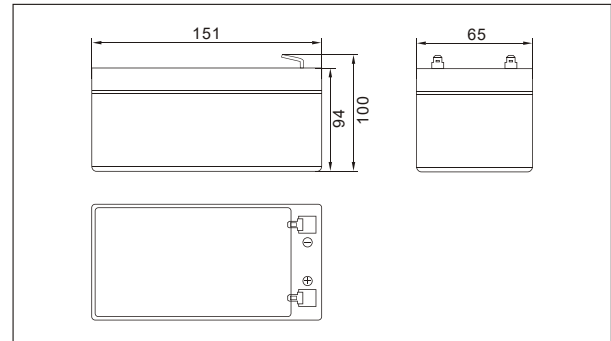

Specifications

Nominal Voltage	12V	
Rated capacity (20 hour rate)	7.0Ah	
Dimensions	Total Height	100mm (3.94 inches)
	Height	94mm (3.70 inches)
	Length	151mm (5.94 inches)
	Width	65mm (2.56 inches)
Weight Approx	2.2Kg (4.85 lbs)	


Terminal Type (mm)

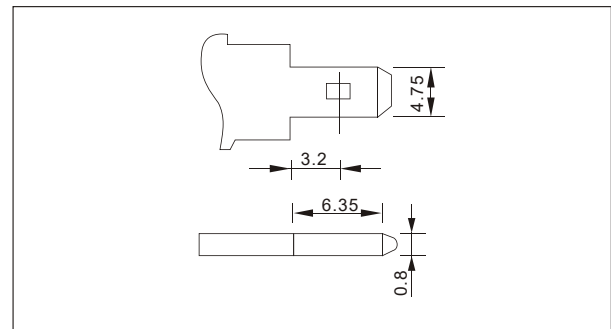

Characteristics

Capacity 25°C(77°F)	20 hour rate(0.35 A)	7.00 AH
	10 hour rate(0.64 A)	6.40 AH
Dimensions	5 hour rate(1.20 A)	6.00AH
	1 hour rate(4.20 A)	4.20 AH
	1.5 hour discharge to 10.5V	3.0 A
	Internal Resistance Full charged Battery at 25°C(77°F)	25 mΩ
Capacity affected by Temperature (20hour rate)	40°C(104°F)	102%
	25°C(77°F)	100%
	0°C(32°F)	85%
	-15°C(5°F)	65%
Self-Discharge at 25°C(77°F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Terminal	T1	
Charge (constant Voltage)	Cycle	Initial Charging Current less than 2.80A Voltage 14.40-14.70V
	Float	Voltage 13.50-13.80V

Discharge Curves 25 °C(77 °F)

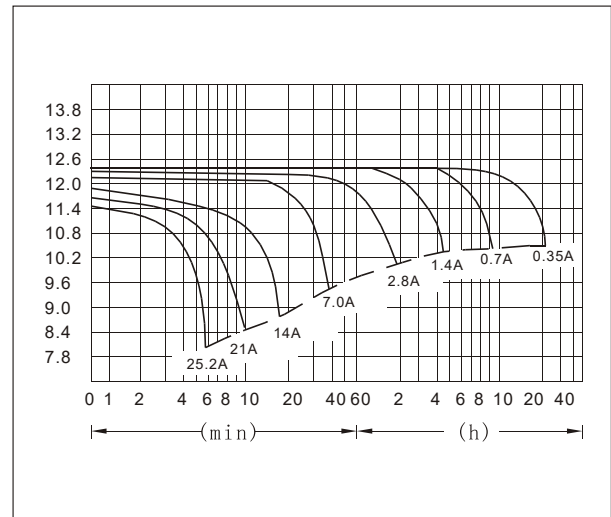

Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h	
9.60V	A	25.2	16.5	12.3	8.1	4.2	2.45	1.80	1.45	1.23	0.81	0.66	0.36
	W	262	177	131	87	46	26.9	20.1	16.3	14.0	9.3	7.6	4.2
10.20V	A	23.1	15.8	11.3	7.6	3.9	2.35	1.75	1.40	1.20	0.80	0.65	0.35
	W	248	177	126	86	45	27.1	20.3	16.3	14.0	9.3	7.6	4.1
10.50V	A	21.0	14.8	10.5	7.4	3.8	2.30	1.72	1.33	1.20	0.79	0.64	0.35
	W	231	168	120	85	44	26.7	20.0	15.6	13.9	9.3	7.6	4.1
10.80V	A	20.2	14.1	9.8	7.2	3.7	2.25	1.69	1.31	1.14	0.77	0.63	0.34
	W	227	163	113	83	43	26.3	20.0	15.4	13.4	9.1	7.5	4.1
11.10V	A	18.7	13.3	9.1	7.0	3.6	2.19	1.60	1.28	1.09	0.75	0.61	0.33
	W	212	154	106	82	42	25.9	19.0	15.3	13.0	9.0	7.4	4.0