


## Lithium Iron Phosphate (LiFePO4) Battery Specification

**SLAUMXLI75-24(25.6V75AH)**




### Outer dimensions (mm)

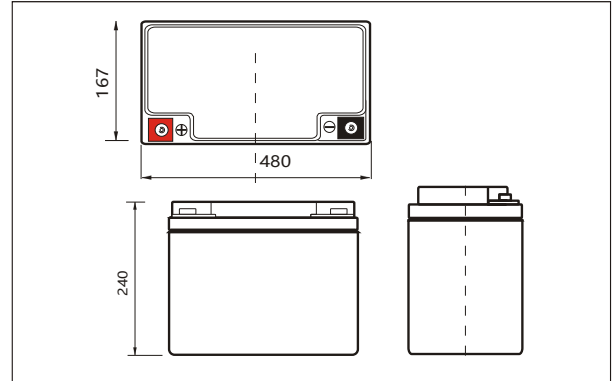

### Specifications

Nominal Voltage	25.6V	
Rated capacity (20 hour rate)	75Ah	
Dimensions	Total Height	240 mm
	Height	240mm
	Length	480 mm
	Width	167 mm
Weight Approx	18.8 Kg	
Terminal	M8	

### Terminal Type (mm)

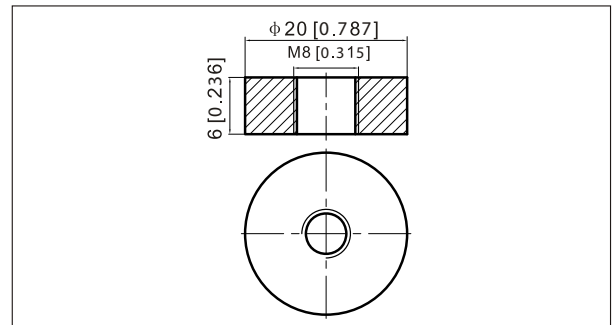

### Characteristics

Capacity Retention	>80% at 28 days	
Cycle Life	>80% at 2000 Cycles	
1.5 hour discharge to 29.2V	3.00 A	
Internal Resistance	<20 mΩ	
Charge Characteristics	Charge Voltage	29.2±0.1V
	Charger Current	<70A
Discharge Characteristics	Max Continuous Current	80A
	Min Discharge Cut-off Voltage	20V
Temperature	Charge Temperature	0°C-45°C(32°F-113°F)
	Discharge Temperature	-20°C-60°C(-4°F-140°F)
	Storage Temperature	0°C-40°C(32°F-104°F)

### Discharge Curves 25°C(77 °F)

